

NOVEMBER 2024
CABSTRUT PIPE & CABLE CLAMPS

SPLIT CLAMPS

- Standard finish galvanised (EG)
- Rubber insert
- Pull strength 600kg
- Twist strength 8kg

Material/Finish:

Mild Steel Zinc-Electroplated (EG)

Pipe Clamp Sizes:

Diameter range stated is the suitable pipe O.D range

Safe Working Load (tensile) :
200 kg

Sound Reduction:
18 dB (A)

Working Temperature Range:
-40°C / +110°C

Fire resistance:

Class B2 (DIN 4102)

Rubber : EPDM Rubber
(Ethylene Propylene Diene Monomer (M-class) rubber)
Thickness : 4 -5mm

REF	Diameter	T (mm)	A (mm)	B (mm)	C (mm)	C (mm)
SC/12-16 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	42.00	
SC/15-19 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	43.00	
SC/20-25 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	45.00	
SC/26-30 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	48.00	
SC/32-36 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	50.00	
SC/38-43 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	52.00	
SC/47-51 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	58.00	
SC/53-58 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	63.00	
SC/60-64 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	68.00	
SC/68-72 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	74.00	
SC/75-80 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	79.00	
SC/81-86 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	82.00	
SC/87-92 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	87.00	
SC/99-105 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	90.00	
SC/107-112 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	102.00	
SC/113-118 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	105.00	
SC/125-130 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	115.00	
SC/132-137 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	127.00	
SC/138-142 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	139.00	
SC/148-152 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	149.00	
SC/159-166 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	162.00	
SC/200-212 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	180.00	
SC/215-220 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	200.00	
SC/249-254 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	225.00	
SC/314-319 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	255.00	



Traditional 2/Piece Clamps

- Standard Finish: Galvanised (PG)
- Fasteners (EG) Supplied separately
- Design Load Safety Factor of 5




Part No.	Overall Ø	Fasteners Required	Design Load	Material Thickness	Price
P2025	8,5-10,0	M6 x 20mm Gutter Bolt & Nut Required	180 kg	1,5mm	20.00
P1108	10,5-12,5		180 kg	1,5mm	20.00
P2026	11,5-13,5		180 kg	1,5mm	20.00
P1108-A	10,5-14,0		180 kg	1,5mm	20.00
P2027	14,5-16,5		180 kg	1,5mm	20.00
P1109	16,0-18,5		180 kg	1,5mm	20.00
P2028	17,0-19,5	M6 x 25mm Gutter Bolt & Nut Required	180 kg	1,5mm	20.00
P1111	21,0-25,5		180 kg	1,5mm	20.00
P2030	25,5-28,0		180 kg	2,0mm	25.00
P1112	27,0-30,0		270 kg	2,0mm	26.00
P2032	30,0-33,5		270 kg	2,0mm	27.00
P1113	32,0-36,0		270 kg	2,0mm	28.00
P2034	35,0-40,0	M8 x 35mm Hex Set Screw & M8 Hex Nut Required	270 kg	2,0mm	30.00
P1114	38,0-44,0		270 kg	2,0mm	31.00
P1115	45,0-51,0		360 kg	2,5mm	45.00
P2038	49,0-52,0		360 kg	2,5mm	46.00
P2039	51,0-56,0		360 kg	2,5mm	47.00
P1117	54,0-70,0		360 kg	2,5mm	51.00
P2043	62,0-75,0	M10 x 50mm Hex Set Screw & M10 Hex Nut Required	360 kg	2,5mm	57.00
P1118	71,0-85,0		360 kg	2,5mm	59.00
P1119	87,0-95,0		360 kg	2,5mm	62.00
P1120	99-110		360 kg	2,5mm	74.00
P1121	110-122		360 kg	2,5mm	80.00
P1122	116-140		360 kg	2,5mm	85.00
P1123	135-145	M10 x 60mm Hex Set Screw & M10 Hex Nut Required	360 kg	2,5mm	88.00
P1124	141-175		360 kg	3,0mm	115.00
P1125	160-200		360 kg	3,0mm	130.00
P1126	196-230		360 kg	3,0mm	140.00
P1127	225-270		360 kg	3,0mm	155.00
P1129	245-280		360 kg	3,0mm	166.00

TP 2/Piece Clamps

- Supplied as one piece including fastener
- Designed for use with Cab-Strut channel
- Practical range of eleven convenient sizes
- Body and screw galvanised (EG)
- Design load 200kg (safety factor of 5)
- Suitable for pipework and cables

Part Number	Overall Diameter mm	Bolt Size mm	Material Thickness mm	Price
TP15/20	15-20	M6 x 20	1,6	22.00
TP20/25	20-25	M6 x 20	1,6	26.00
TP25/30	25-30	M6 x 20	1,6	27.00
TP30/40	30-40	M6 x 20	2,0	38.00
TP40/50	40-50	M8 x 20	2,0	41.00
TP50/60	50-60	M8 x 20	2,0	48.00
TP60/70	60-70	M8 x 20	2,0	52.00
TP70/80	70-80	M8 x 20	2,5	66.00
TP80/90	80-90	M8 x 20	2,5	74.00
TP90/100	90-100	M8 x 30	2,5	77.00
TP100/110	100-110	M8 x 30	2,5	82.00
TP110/120	110-120	M8 x 30	2,5	86.00
TP120/130	120-130	M8 x 30	2,5	92.00

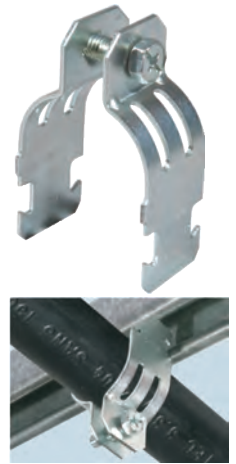

Strap Clamps

- Supplied with strap, studs, nuts, washers and collets
- Designed for use with Cab-Strut channel
- Practical range of four convenient straps which are fully adjustable and offer a very flexible range of sizes
- Strap, studs, nuts, washers and collets galvanised (EG)
- Suitable for large diameter poles and pipes

Part Number	Diameter	Strap Length	Thread Size	Stud Length	Price
i0004226	75-100mm	160mm	M10	85mm	150.00
i0004227	100-125mm	200mm	M10	95mm	155.00
i0004228	125-150mm	230mm	M10	115mm	160.00
i0004229	150-175mm	295mm	M10	120mm	170.00
i0004230	175-200mm	325mm	M10	135mm	175.00



CABSTRUT PIPE & CABLE CLAMPS

NOVEMBER 2024


"Q" CLAMPS- SG GALVANISED

Clamp Size	Bolt Size	Price	Clamp Size	Bolt Size	Price
Q16mm	M6	33.00	Q52mm	M8	74.00
Q20mm	M6	37.00	Q58mm	M8	80.00
Q26mm	M6	40.00	Q66mm	M8	85.00
Q32mm	M6	46.00	Q70mm	M8	90.00
Q40mm	M8	62.00	Q78mm	M8	95.00
Q46mm	M8	65.00			


- Light & strong
- Body galvanised (SG)
- Screw galvanised (SG)
- One common clamp for all applications



Cable Ladder
Cross Rung



Angle Iron



CAB-STRUT Channel




Wire Mesh Tray



P75 HANGER CLAMPS

Part Number	NOM. BORE	A Ø (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Price
P75/15	15	21	52	25	1,6	M8	19.00
P75/20	20	27	57	25	1,6	M8	20.00
P75/25	25	34	68	25	1,6	M8	21.00
P75/32	32	42	75	25	1,6	M8	24.00
P75/40	40	48	87	25	1,6	M8	25.00
P75/50	50	60	110	25	1,6	M8	29.00
P75/65	65	76	118	25	2,0	M10	48.00
P75/80	80	89	129	25	2,0	M10	54.00
P75/100	100	114	152	25	2,0	M10	79.00
P75/125	125	140	194	25	2,5	M10	191.00
P75/150	150	166	228	25	3,0	M10	224.00
P75/200	200	219	295	30	3,5	M12	251.00


- Standard finish galvanised (PG)
- Fasteners (EG)
- Suitable for hanging plumbing, drainage and sprinkler pipes



SADDLE CLAMPS

Part No.	Nom. Bore	A Ø (mm)	Bolt (mm)	Price	Part No.	Nom. Bore	A Ø (mm)	Bolt (mm)	Price
SS1	15	21	M6	12.00	SS1/7	80	88	M8	34.00
SS1/1	20	26	M6	14.00	SS1/8	100	101	M8	39.00
SS1/2	25	34	M6	17.00	SS1/9	125	114	M8	50.00
SS1/3	32	42	M6	20.00	SS1/10	150	142	M8	80.00
SS1/4	40	48	M6	23.00	SS1/11	-	173	M8	95.00
SS1/5	50	60	M6	26.00	SS1/12	200	225	M8	118.00
SS1/6	65	76	M6	29.00					

Standard finish galvanised (PG)
Fasteners not included


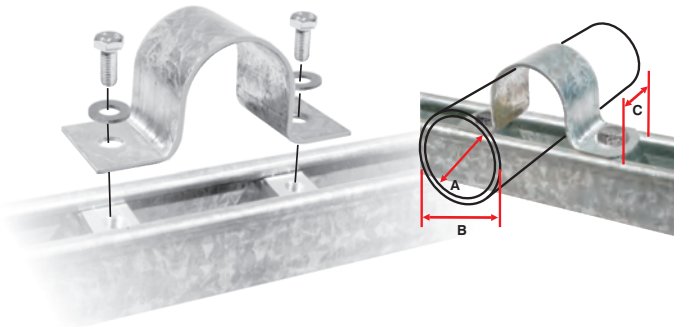


ALUMINIUM TREFOIL CLAMPS

Part No.	Cable Size A (mm)	Mat. (mm)	Bolt (mm)	Plate Length (mm)	Price
TR-30	30	4,5	M6	120	270.00
TR-37	37	4,5	M6	149	295.00
TR-42	42	4,5	M6	174	345.00
TR-48	48	4,5	M6	174	360.00
TR-53	53	4,5	M6	199	385.00
TR-57	57	4,5	M6	199	395.00
TR-63	63	4,5	M6	224	405.00

- No magnetic circuit can be created in aluminium
- Trefoil clamps can withstand a rupturing capacity of 95kA at 750mm spacings

Aluminium 40mm wide x 4,5mm thick

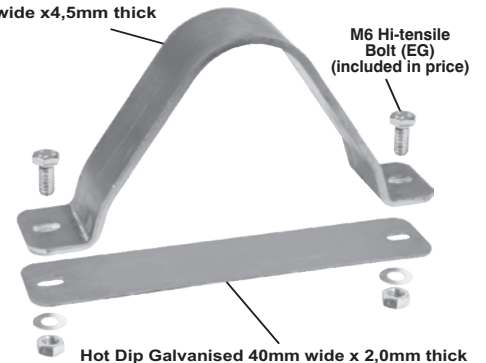

Hot Dip Galvanised 40mm wide x 2,0mm thick

CABLE DIAMETER/MASS

Rated area mm²	Number of cores	Max. overall dia. mm	Nett mass kg/100m
1,5	2	13,7	33
	3	14,2	37
	4	15,1	41
	7	17,6	55
	12	22,9	89
2,5	2	14,5	39
	3	16,1	43
	4	16,9	51
	7	20,0	79
4	2	16,8	49
	3	17,5	55
	4	19,4	75
	7	22,5	101
6	2	18,6	67

Rated area mm²	Number of cores	Max. overall dia. mm	Nett mass kg/100m
6	3	19,6	77
	4	20,9	89
	2	20,7	85
10	3	21,9	99
	4	23,4	117
	2	23,1	108
16	3	25,9	149
	4	27,9	176
	2	22,4	113
25	3	26,9	173
	4	29,1	211
	2	23,9	138
35	3	28,8	213
	4	32,5	283

Rated area mm²	Number of cores	Max. overall dia. mm	Nett mass kg/100m
35	3	33,2	295
50	4	36,5	367
	3	36,5	275
70	4	40,2	471
	3	41,3	486
95	4	45,2	610
	3	43,7	567
120	4	47,9	716
	3	47,4	685
150	4	53,7	922
	3	53,0	864
185	4	58,7	1092
	3	59,2	1076
240	4	66,7	1438